


บริษัท โอเอ็มเอส แพคเกจจิ้ง (ประเทศไทย) จำกัด



Packaging Solutions

General Catalog

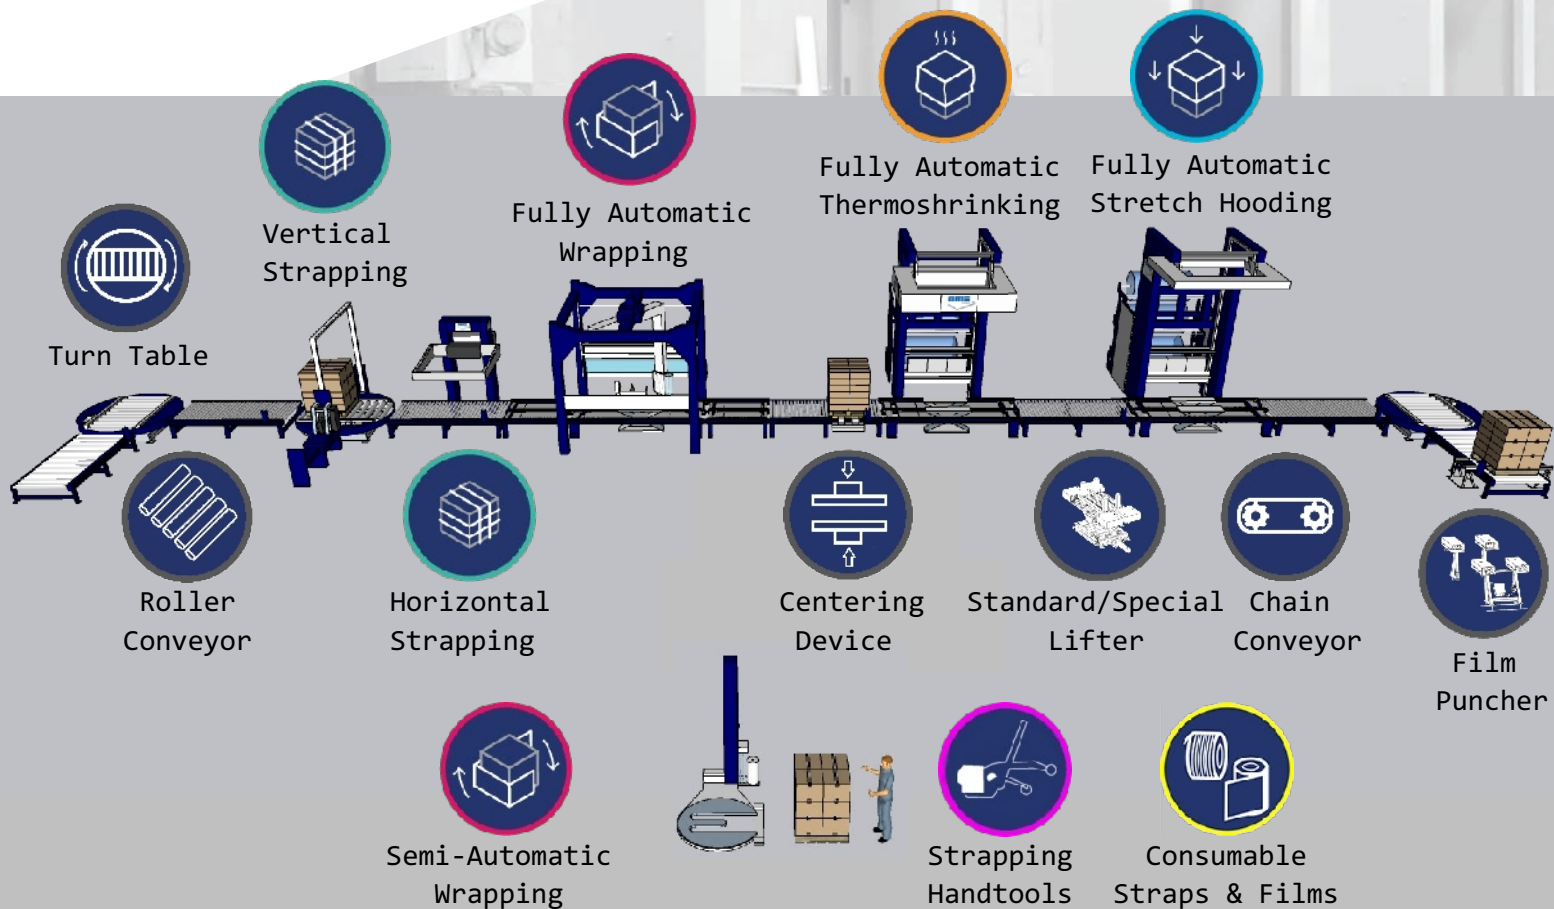

OMS Packaging (Thailand) Co.,Ltd.



@omsthailand



@omsthailand




@omsthailand

OMS PACKAGING (THAILAND) CO.,LTD.

www.omsthailand.com


Heat Sealing Technology

TR1400-1400HD




Strap type : PP - PET
Strap width : 9 - 16 mm.
Strap thickness : 0.6 - 1 mm.
Max feeding/recovery speed : 5.5 m/s
Strap tensioning : 2300 N
Utilization temperature : -10 to 50 °C
Noise level : < 70 dB
Options : Strap Feeding Device

TR1800




Strap type : PET
Strap width : 12 - 19 mm.
Strap thickness : 0.6 - 1 mm.
Max feeding/recovery speed : 2.7 m/s
Strap tensioning : 4000 N
Utilization temperature : -10 to 50 °C
Noise level : < 70 dB
Options : Strap Feeding Device

TR2000




Strap type : PET
Strap width : 16 - 19 mm.
Strap thickness : 0.8 - 1.3 mm.
Max feeding/recovery speed : 2.7 m/s
Strap tensioning : 7000 N
Utilization temperature : -10 to 50 °C
Noise level : < 70 dB
Options : Strap Feeding Device

TR200



Strap type : PP
Strap width : 8 - 12 mm.
Strap thickness : 0.5 - 0.8 mm.
Max feeding/recovery speed : 4.4 or 8.8 m/s
Strap tensioning : Up to 1500 N
Utilization temperature : -10 to 50 °C
Noise level : < 70 dB
Options : Strap Feeding Device



HS1300

Strap type : PP
Strap width : 9 - 16 mm.
Strap thickness : 0.6 - 1 mm.
Max feeding/recovery speed : 7.0 m/s
Strap tensioning : Up to 3500 N
Utilization temperature : 5 to 50 °C
Noise level : < 70 dB
Options : Strap Auto Load



Friction Sealing Technology




VYBRO Plus

Strap type : PP - PET
Strap width : 9 - 12 mm.
Strap thickness : 0.4 - 0.6 mm.
Max feeding/recovery speed : 5.5 m/s
Strap tensioning : Up to 1500 N
Utilization temperature : 5 to 50 °C
Noise level : < 70 dB
Options : Strap Refeeding Device




Ultrasonic Sealing Technology



SONIC Plus

Strap type : PP - PET
Strap width : 9 - 12 mm.
Strap thickness : 0.4 - 0.6 mm.
Max feeding/recovery speed : 5.5 m/s
Strap tensioning : Up to 1500 N
Utilization temperature : -10 to 50 °C
Noise level : < 70 dB
Options : Strap Refeeding Device

FULLY AUTOMATIC STRAPPING MACHINES

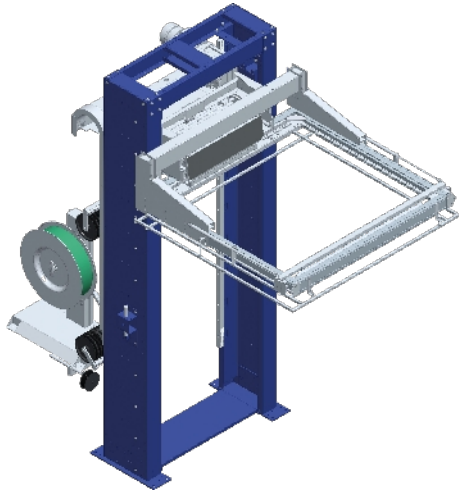

06RP

Horizontal Strapping Machine

Strapping heads TR1400/TR1400HD (PET/PP)
 that can be used : TR1800 (PET)
 Applications :




Construction



Plastic/Can



Glass

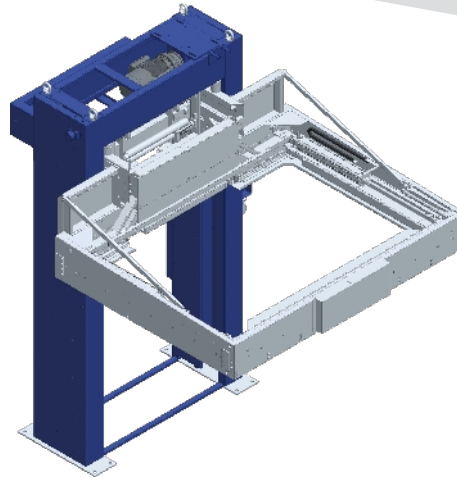

06C

Horizontal Strapping Machine

Strapping heads TR1400/TR1400HD (PET/PP)
 that can be used :
 Options : - Edgeboard application device
 - Model 06CL with compactor
 only for Glass

Applications :




Construction



Ceramic



Glass

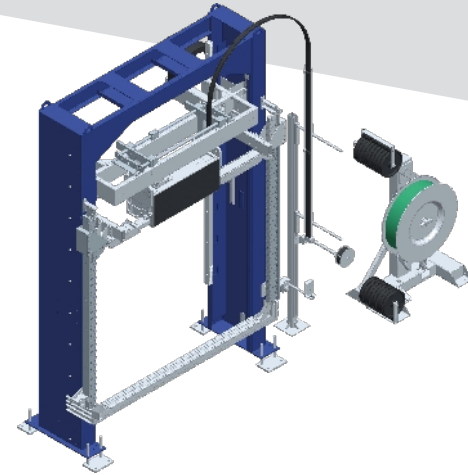

08RP

Vertical Strapping Machine

Strapping heads TR1400/TR1400HD (PET/PP)
 that can be used : TR1800/TR2000 (PET)
 Options : - Shifting device
 - Sword
 - Model 08RPH only for Glass

Applications :



Ceramic




Paper



Wood & Profiles



Plastic/Can

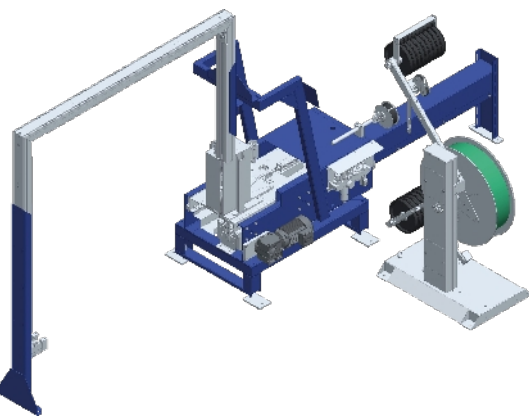

0875AB

Lateral Strapping Machine with Movable Head & Sword

Strapping heads VYBRO Plus / SONIC Plus
 that can be used : TR1400/TR1400HD (PET/PP)
 TR1800 (PET)
 Options :
 - Model 0875
 (Fixed arch & head)
 - Model 0875A
 (Fixed arch & Movable head)


Applications :



White Goods



Plastic/Can

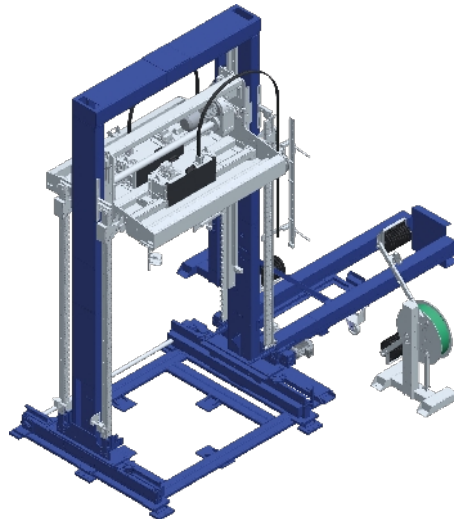

078 - 082

Vertical Strapping Machine with Press

Strapping heads VYBRO Plus / SONIC Plus
 that can be used : TR1400/TR1400HD (PET/PP)
 TR1800/TR2000 (PET)

Options : - Shifting device

Applications :




Construction



Plastic/Can



Glass

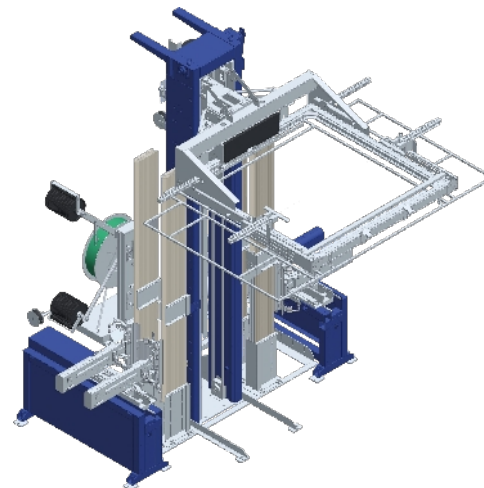


06GS

Horizontal Strapping Machine

Strapping heads TR1400 (PET/PP)
 that can be used : TR200 (PP)
 Options : Edgeboard application device
 Applications :



Fruit

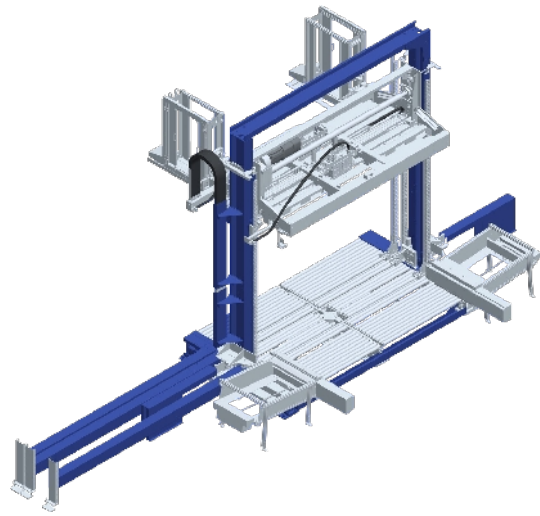

PRESS MASTER PLUS

Cardboard Strapping Press

Strapping heads VYBRO Plus / SONIC Plus
that can be used : TR1400/TR1400HD (PET/PP)

Options :
- Upper & lower edge
cardboard applicator
- Lift and Turn device
- Centering device


Applications :



Cardboard



Paper

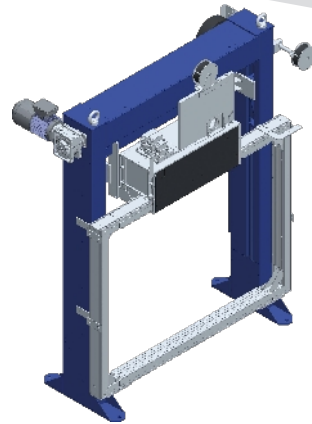

08 ACTIVE

Vertical Strapping Machine


Strapping heads TR1400/TR1400HD (PET/PP)
that can be used : TR2000 (PET)

Options : Top / Bottom / Side filelet applicator
cardboard applicator

Applications :



Ceramic

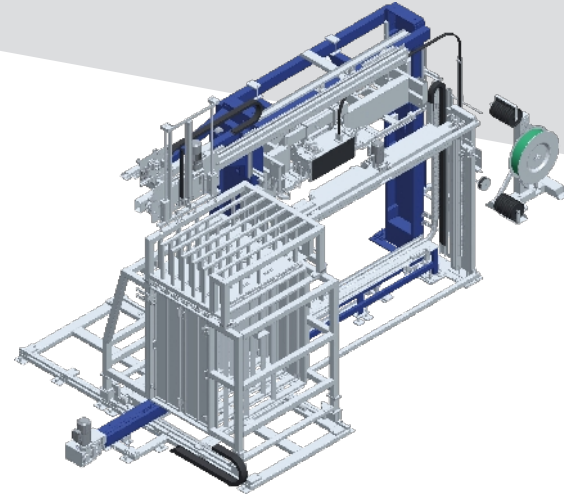

08L

Vertical Strapping Machine
Timber and Chipboard


Strapping heads TR1400/TR1800/TR2000 (PET)
that can be used :

Options : - Upper & lower edgeboard
application device
- Upper & lower lateral wooden
runner device

Applications :



Wood & Profiles

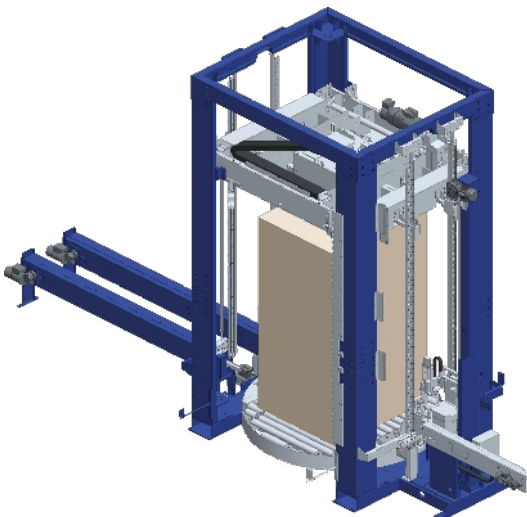

AVFP2

Combined Strapping/Wrapping Machine


Strapping heads VYBRO Plus / SONIC Plus
that can be used : TR1400/TR1400HD (PET/PP)

Options : Edgeboard application device

Applications :



Cardboard

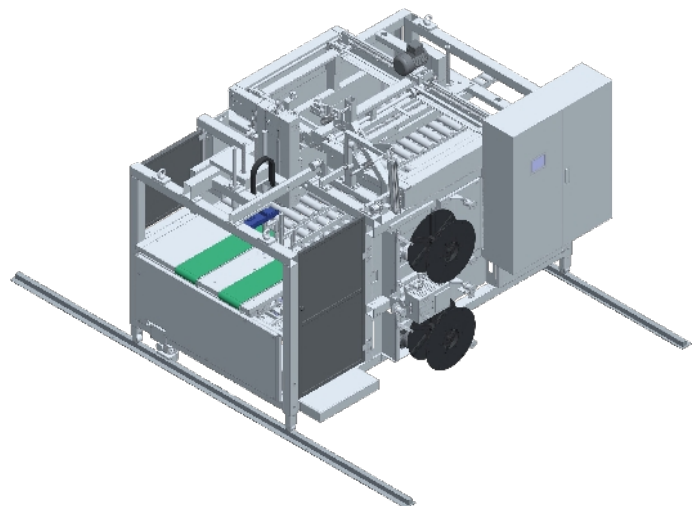

ISM300 - ISM600

In-line Bundle Square

Strap Type : Polyester (PET) - Polypropylene (PP)


Options : - Automatic Shifting device
- Automatic Coil Exchange

Applications :



Cardboard

FULLY AUTOMATIC WRAPPING MACHINES

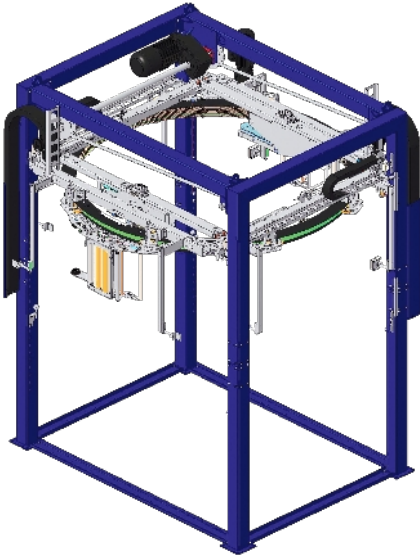

AVR1000

Ring Wrapping Machine

Film type : Stretch polyethylene


Production Capacity : Up to 100 packs/hour
(140 p/h Twin version)

Options : Motorized pantograph stabilizer press
Gravity stabilizer press
Lifting device
Single band lower
Double twins bands lower

Applications :



Cardboard Paper Ceramic Plastic/Can Bags

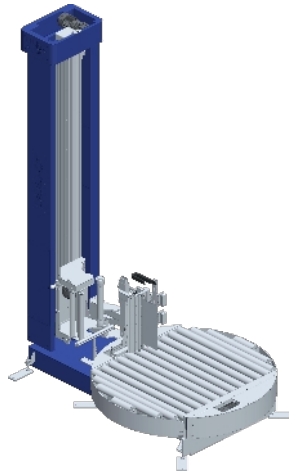

AV300

Rotary Table Wrapping Machine

Film type : Stretch polyethylene


Production Capacity : Up to 35 packs/hour

Options : Top press
Top sheet dispenser
Motorized pre-stretch system

Applications :



Cardboard Paper

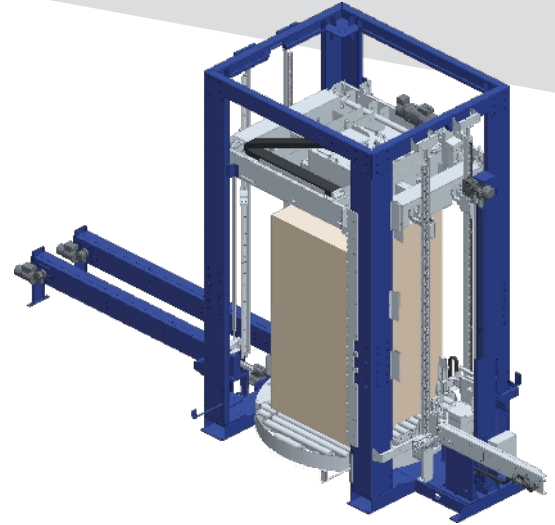

AVFP2

Combined Strapping/Wrapping Machine


Strapping heads VYBRO Plus / SONIC Plus
that can be used : TR1400/TR1400HD (PET/PP)

Options : Edgeboard application device

Applications :



Cardboard

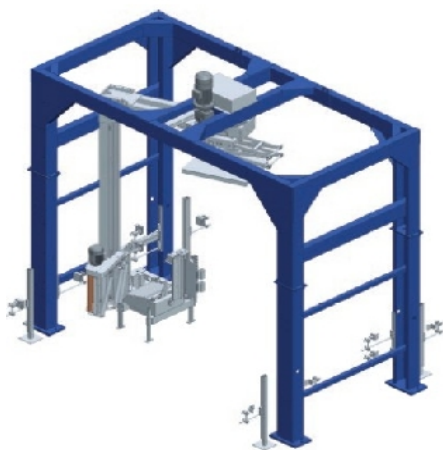

AV1620

Rotating Arm Wrapping Machine


Film type : Stretch polyethylene

Production Capacity : Up to 60 packs/hour

Applications :



Cardboard Paper Ceramic Plastic/Can Bags

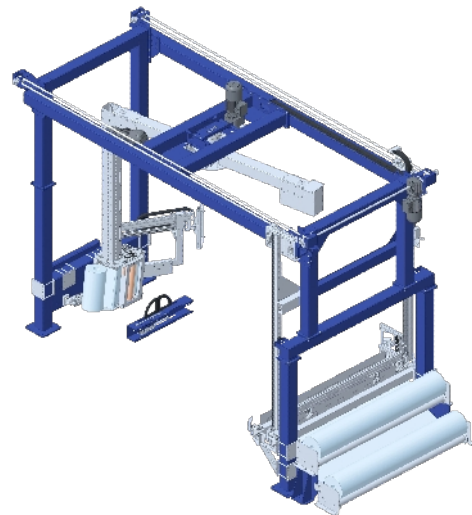

AV1800

Rotating Arm Wrapping Machine with Top Sheet Dispenser

Film type : Stretch polyethylene

Production Capacity : Up to 60 packs/hour

Options : Top sheet dispenser
Motorized or Pneumatic top press, Stabilizer
Roping device

Applications :



Cardboard Paper Ceramic Plastic/Can Bags



SPINNY

Turntable Wrapping machine

Max Load : 2000 KG.

Pre-Stretch : Up to 300%

Turntable dia. : Optional for 1500, 1650, 1800, 2200 mm.

Wrapping Height : Optional for 2100, 2600, 3100 mm.

Optionals :

- Additional Top Press.
- Automatic Cut & Weld system.
- Embossed access ramp.



OSCAR

Robot Wrapping machine

Max Wrapping Height : 3000 mm. (Optionals)

Pre-Stretch : Motorized pre-stretch 150% standard
(100%, 200%, 250% on request)
(For only V5 model)




ROTAX

Semi-Automatic Arm Rotating Wrapping Machine

Main Features :

- Pre-Stretch up to 300 %
- Pallet Height Detect with Photocell.
- Variable speed of film carriage completely customaizable.
- Standard Pallet's Height 2100 mm.
- 10 protected password programs.
- All motors controlled by inverters.

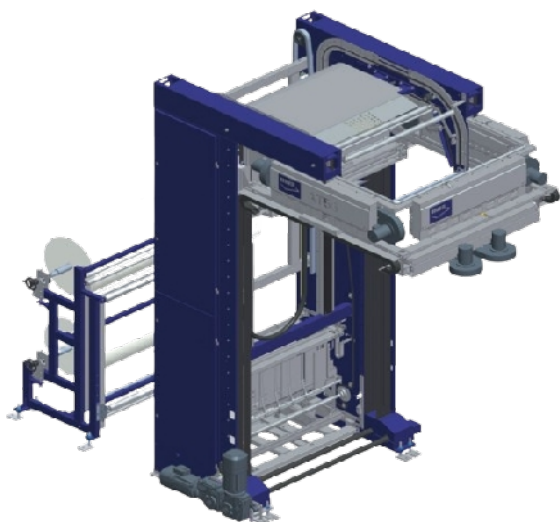

AT55

Thermoshrinking Hooding Machine

Film type : Polyethylene Thermo (LDPE)

Production Capacity : Up to 70 packs/hour

Options : Lifting device


Infeed centering device

Double or Triple coils

Applications :



Glass

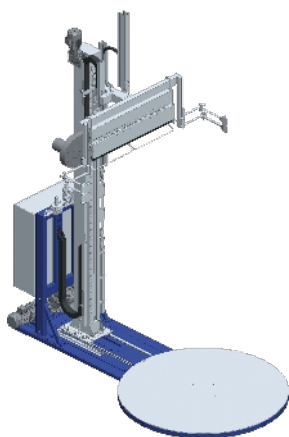

FT22

Thermoshrinking Oven

Film type : Polyethylene Thermo (LDPE)

Platform's max.

Load capacity : 2000 kg


Options : Gas pressure reduction ramp

Pack loading ramp

Applications :



Ceramic

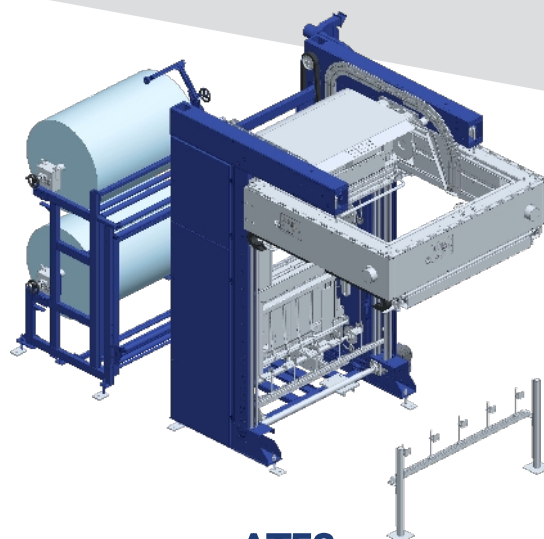

AT53

Thermoshrinking Hooding Machine

Film type : Polyethylene Thermo (LDPE)

Production Capacity : 60 packs/hour

Options : Lifting device

Infeed centering device

Double or Triple coils

Applications :



Glass



Ceramic



Construction




White Goods



Plastic/Cans



Bags

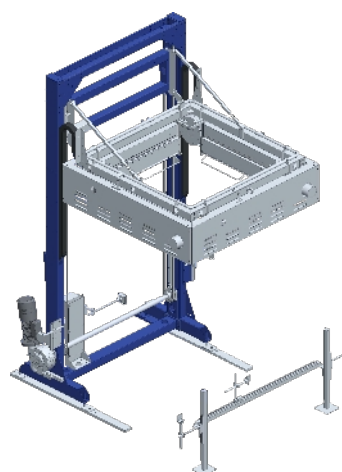

FT55

Thermoshrinking Oven

Film type : Polyethylene Thermo (LDPE)

Production capacity : 2000 kg

Options : Lifting device

Available for LPG/Propane

Applications :



Glass



Ceramic



Construction




Plastic/Cans



Bags

FULLY AUTOMATIC STRETCH HOODING MACHINES

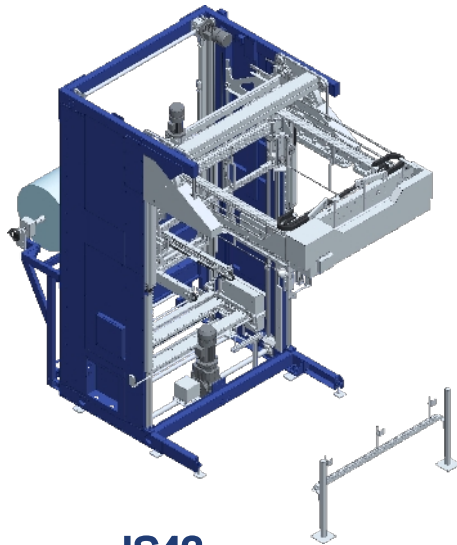

IS43

Stretch Hooding Machine

Film type : Stretch Polyethylene

Production Capacity : From 25 to 120 Pallets/hour

Options : Lifting device
 Infeed centering device
 Double or Triple coils

Applications :



Ceramic



Construction




White Goods



Plastic/Cans



Bags

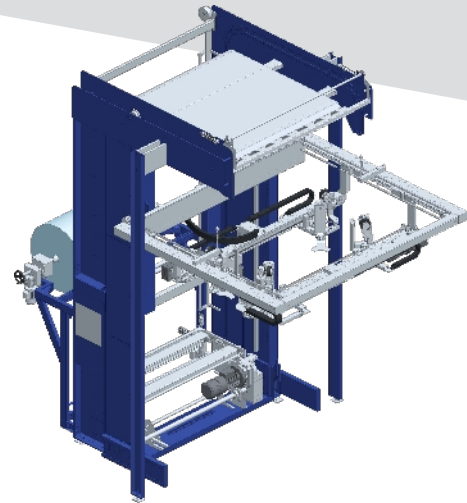

IS44

Stretch Hooding Machine

Film type : Stretch Polyethylene

Production Capacity : Up to 100 Pallets/hour

Options : Lifting device
 Infeed centering device
 Double or Triple coils
 Shifting coil-holder

Applications :



Ceramic



Construction




White Goods



Plastic/Cans



Bags

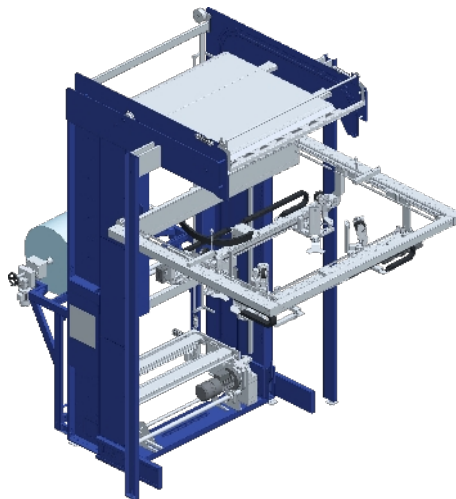

IS46

Stretch Hooding Machine

Film type : Stretch Polyethylene

Production Capacity : Up to 220 Pallets/hour

Options : Lifting device
 Infeed centering device
 Double or Triple coils
 Shifting coil-holder

Applications :



Paper



Construction



Cardboard



Plastic/Cans



Bags



Battery Plastic Strapping Tools



Dynamic 2100

Operation : Battery

Strap Type : PET and PP

Strap Dimensions : 16.0 - 19.0 mm.



P318

Operation : Battery

Strap Type : PET and PP

Strap Dimensions : 9.0 - 13.0 mm.



P328

Operation : Battery

Strap Type : PET and PP

Strap Dimensions : 12.0 - 16.0 mm.



P328S

Operation : Battery

Strap Type : PET and PP

Strap Dimensions : 12.0 - 16.0 mm.



P329

Operation : Battery

Strap Type : PET and PP

Strap Dimensions : 16.0 - 19.0 mm.



P329S

Operation : Battery

Strap Type : PET and PP

Strap Dimensions : 16.0 - 19.0 mm.



P331

Operation : Battery

Strap Type : PET

Strap Dimensions : 19.0 - 32.0 mm.

Pneumatic Plastic Strapping Tools



P357

Operation : Pneumatic

Strap Type : PET and PP

Strap Dimensions : 12.7 - 16.0 mm.



P358

Operation : Pneumatic

Strap Type : PET and PP

Strap Dimensions : 16.0 - 19.0 mm.



P359

Operation : Pneumatic

Strap Type : PET

Strap Dimensions : 19.0 - 32.0 mm.



P380

Operation : Pneumatic

Strap Type : PET and PP

Strap Dimensions : 13.0 - 19.0 mm.

Manual Plastic Strapping Tools



P403

Operation : Manual

Strap Type : PET and PP

Strap Dimensions : 11.0 - 13.0 mm.



P404

Operation : Manual

Strap Type : PET and PP

Strap Dimensions : 15.0 - 16.0 mm.



Manual Steel Strapping Tools



Dynamic 2000

Operation : Manual

Strap Type : Steel

Strap Dimensions : 12.7 - 20.0 mm.



A332

Operation : Manual

Strap Type : Steel

Strap Dimensions : 9.5 - 13.0 mm.



A333

Operation : Manual

Strap Type : Steel

Strap Dimensions : 12.7 - 20.0 mm.



A335

Operation : Manual

Strap Type : Steel

Strap Dimensions : 12.7 - 19.0 mm.



A337

Operation : Manual

Strap Type : Steel

Strap Dimensions : 9.5 - 20.0 mm.



A338

Operation : Manual

Strap Type : Steel

Strap Dimensions : 12.7 - 19.0 mm.



A431

Operation : Manual

Strap Type : Steel

Strap Dimensions : 10.0 - 19.0 mm.



A301 / A412 or A402 / A412

Operation : Manual

Strap Type : Steel

Strap Dimensions : 19.0 - 32.0 mm.

Pneumatic Steel Strapping Tools



A380

Operation : Pneumatic

Strap Type : Steel

Strap Dimensions : 12.7 - 25.0 mm.



A383

Operation : Pneumatic

Strap Type : Steel

Strap Dimensions : 19.0 - 32.0 mm.



A385

Operation : Pneumatic

Strap Type : Steel

Strap Dimensions : 9.5 - 20.0 mm.



A390

Operation : Pneumatic

Strap Type : Steel

Strap Dimensions : 12.0 - 16.0 mm.



A391

Operation : Pneumatic

Strap Type : Steel

Strap Dimensions : 12.7 - 19.0 mm.



A452

Operation : Pneumatic

Strap Type : Steel

Strap Dimensions : 19.0 - 32.0 mm.



A461

Operation : Pneumatic

Strap Type : Steel

Strap Dimensions : 19.0 - 32.0 mm.



A480

Operation : Pneumatic

Strap Type : Steel

Strap Dimensions : 10.0 - 19.0 mm.



A482

Operation : Pneumatic

Strap Type : Steel

Strap Dimensions : 19.0 mm.



A483

Operation : Pneumatic

Strap Type : Steel

Strap Dimensions : 25.0 - 32.0 mm.



High Quality PET Strap



General Information


Strap Width Available :	9.0 - 32.0 mm.
Strap Thickness Available :	0.5 - 1.36 mm.
Inner Coil Diameter :	400 mm.
Elongation :	17 - 22% (BSI/EN 13394) or 7 - 12% (JIS Z1527 - 2002)
Surface Available :	Embossed / Smooth
Color Available :	

High Quality Stretch Film




General Information

Type Available :	Hand / Machine Grade.
Film Thickness Available :	15.0 - 23.0 Micron
Inner Coil Diameter (C) :	50 mm. (Hand Grade) / 75 mm. (Machine Grade)
Outer Coil Diameter (B):	60 mm. (Hand Grade) / 250 mm. (Machine Grade)
Film Length / Roll :	300 - 500 m. (Hand Grade) / 1500 - 2500 m. (Machine Grade)
Coil Width (A) :	500 mm.

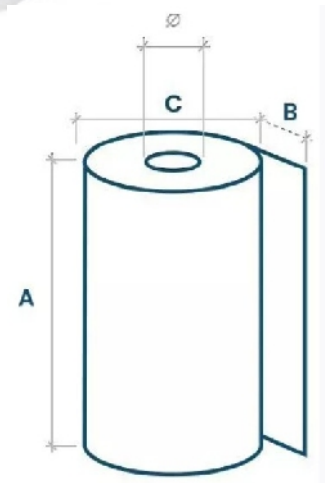

OMS in the World

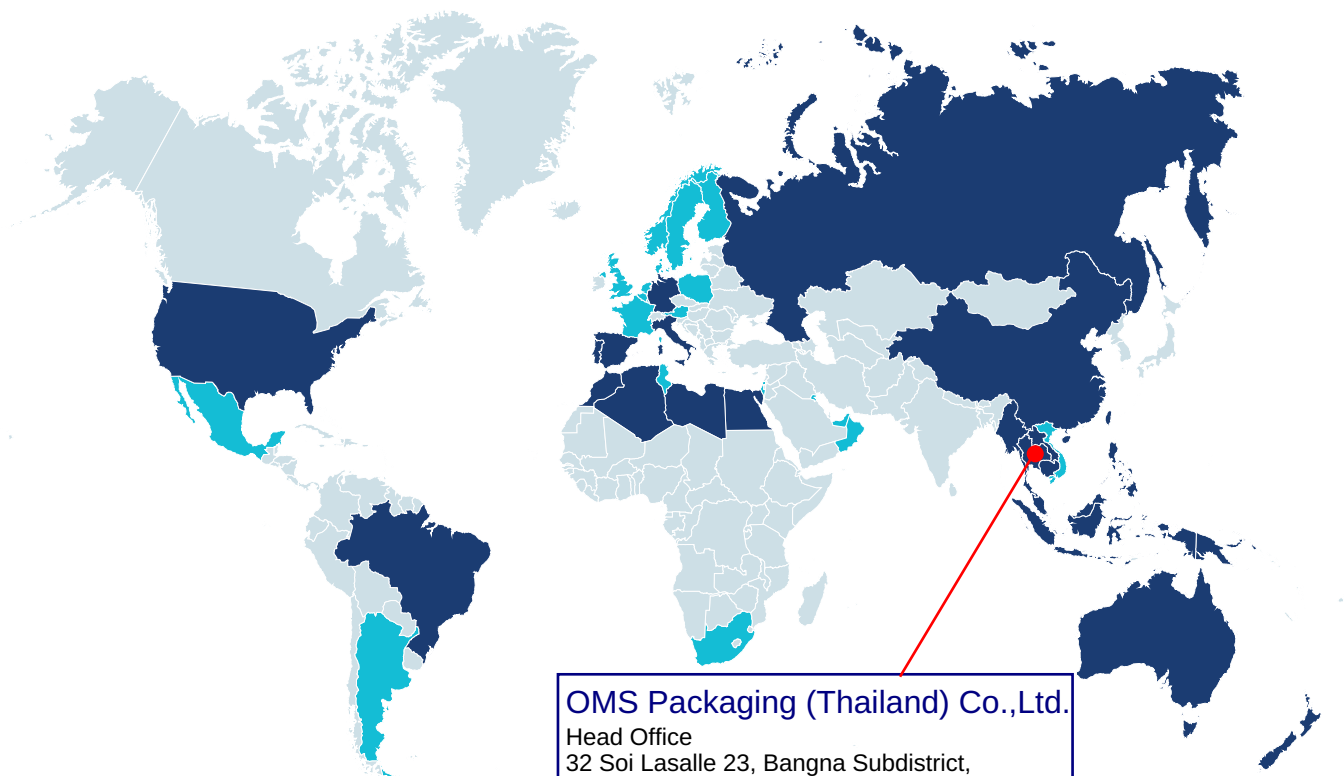

● Subsidiaries ● Distributors

OMS Packaging (Thailand) Co.,Ltd.

Head Office
32 Soi Lasalle 23, Bangna Subdistrict,
Bangna, Bangkok, Thailand 10260
Tel : +66(0)2-749-0400
Fax : +66(0)2-749-1300

ITALY

www.omsspa.com
www.omstrap.it
www.marpak.it

GERMANY

www.oms-ips.com

SPAIN

www.omsespana.com

PORTUGAL

www.embalcer.pt

RUSSIA

www.omssystems.ru

MAGHREB

contact@omsmaghreb.com

SINGAPORE

www.omssin.com.sg

BRASIL

www.omsbr.com.br

USA

www.greenbridge.com

AUSTRALASIA

www.omsaus.com.au

THAILAND

www.omsthai.com

UK

www.gordianstrapping.co.uk

AUSTRIA

www.riegler-verpackungstechnik.com

BENELUX

www.certis.be

FRANCE

www.getra.fr

UAE / OMAN / KUWAIT

www.consentplastic.ae

DENMARK

www.walpak.dk

FINLAND

www.telpak.fi

MEXICO

enrico@italcer.net

ARGENTINA

www.exim-consult.com

ISRAEL

www.mmts.co.il

TUNISIA

www.toupackgroup.com

VIETNAM

sales_advance@hcm.fpt.vn

SOUTH AFRICA

www.futurepack.co.za



Head Office สำนักงานใหญ่

Tel: +66 (02) 749 0400-1
Fax: +66 (02) 749 1300
E-mail: enquiry@omsthai.com

Projects & Machines Sales เครื่องจักรและงานโครงการ

Mr.Aikawit Suriyapaibulwatana
(นายเอกรวิทย์ สุริยาไพบูลย์วัฒนา)
Tel : +66(0)88-987-8945
E-mail : aikawit@omsthai.com

Strapping Tools & Packaging Materials Sales เครื่องมือรัดสาย, สายรัดและฟิล์มยึด

Mr.Rawat Pitaksakul
(นายเรวัต พิทักษ์สกุล)
Tel : +66(0)82-925-5190
E-mail : rawat@omsthai.com